

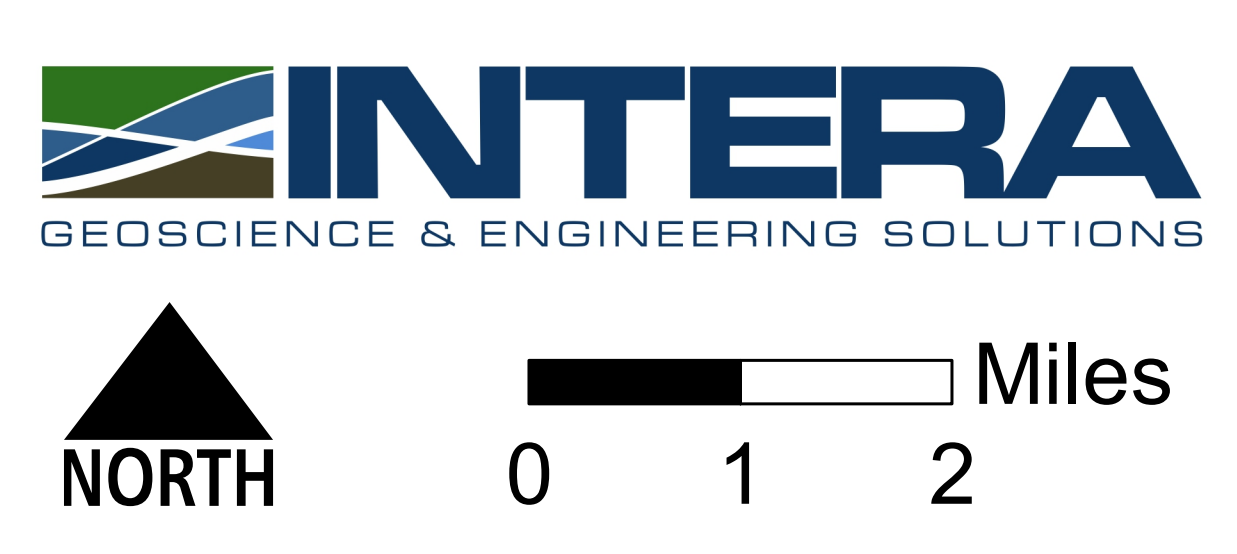


Water Resources and Use in Brown County

Data Sources: U.S. Geological Survey and Indiana Department of Natural Resources

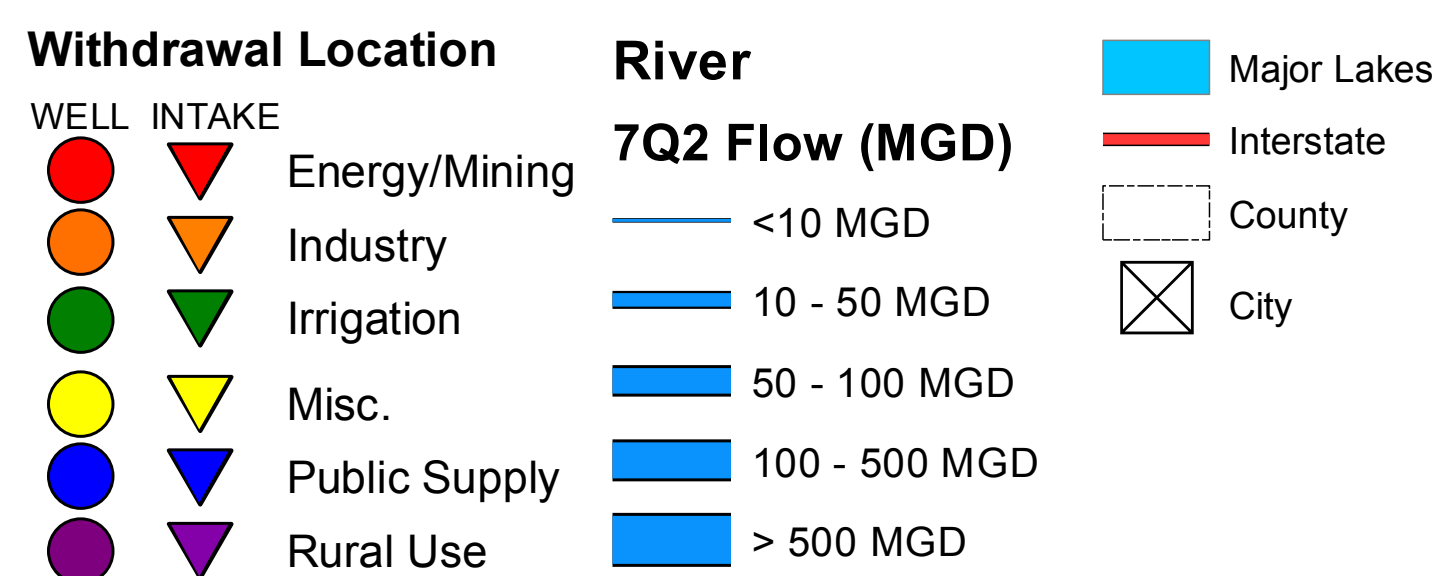

BEDROCK AQUIFER SYSTEMS OF BROWN COUNTY, INDIANA

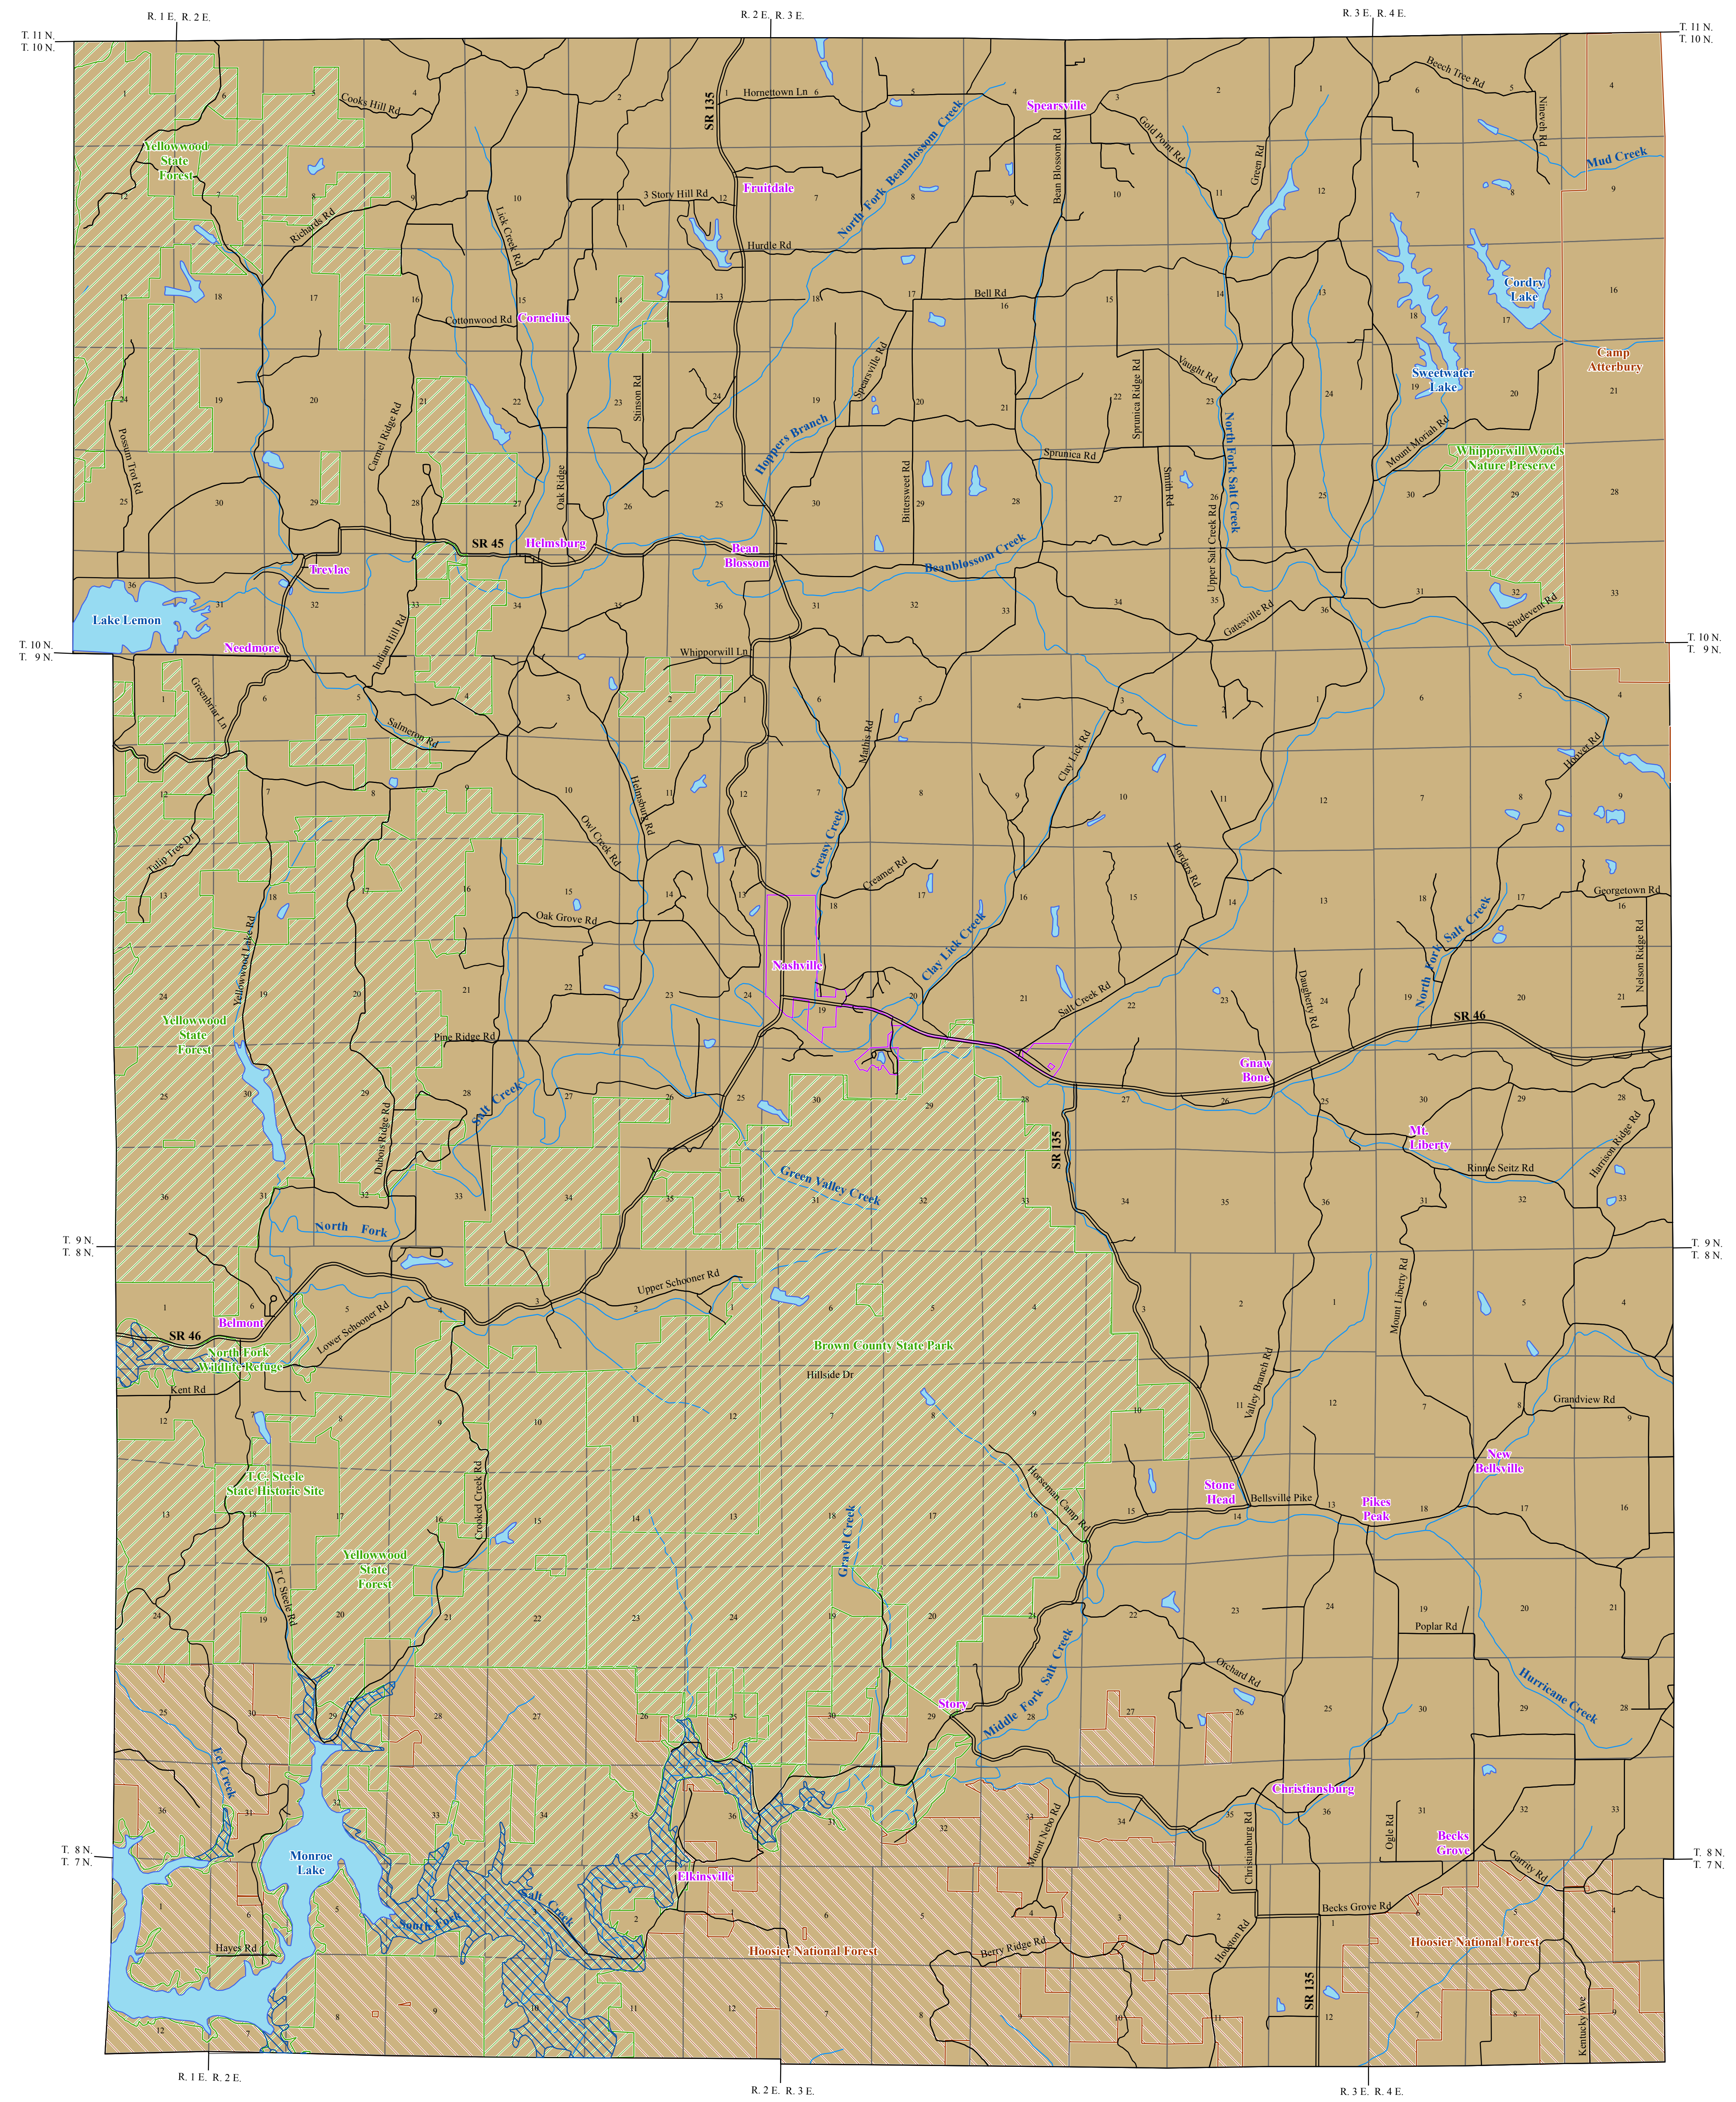

Bedrock aquifers are commonly used in Brown County because the overlying unconsolidated materials are so thin. Two bedrock aquifer systems are utilized: the Mississippian Borden Group (occurring at or near land surface) and the Silurian and Devonian Carbonate Aquifer System. Stratigraphically separating these two bedrock aquifer systems is the Devonian and Mississippian New Albany Shale Aquifer System, which in the subsurface of Brown County is regarded more as an aquitard.

Mississippian Borden Group Aquifer System

The Mississippian Borden Group Aquifer System encompasses all of Brown County and is a primary, but extremely limited source of ground water. The thickness of this aquifer system in the county ranges from about 250 feet to 700 feet, with the bedrock strata dipping and thinning to the southwest. The Borden is composed mostly of siltstone and shale. Fine-grained sandstones are common, especially in the upper third of the group. Carbonates are rare, occurring mostly as discontinuous interbedded limestone lenses in the upper portion of the group. Immediately below the Borden is the Rockford Limestone. Where present it is an important marker bed separating the Borden Group from the underlying Devonian and Mississippian New Albany Shale.

Depths of existing wells in the Borden Group range from 15 to 380 feet. Most wells, however, are completed at depths between 60 and 175 feet. The amount of Borden rock penetrated typically ranges from about 40 to 140 feet, with a maximum of 320 feet. Most of the water is found in the upper 100 feet of the rock, although data are not sufficient to correlate yields with the amount of penetration. Static water levels in the wells completed in the Borden range from 0 to 300 feet below land surface, but are commonly between 20 and 60 feet.

The Borden Group is often regarded as an aquitard. Its water production potential is quite limited and many dry holes are noted. Attempts to get large volumes of water from wells drilled into it have generally failed. In some instances the Borden is bypassed and deeper wells are drilled into the underlying Silurian and Devonian Carbonate Aquifer System. Wells over 400 or 500 feet deep will commonly encounter nonpotable (mineralized or salty) water.

Many wells in the Borden Group are barely able to produce sufficient water for domestic purposes. Few wells yield more than 5 gpm. A very limited number of wells report up to 20 gpm, but it is doubtful that they can sustain such a high rate for more than a few minutes. The higher yielding wells may be located where the amount of sandstone in the Borden is greatest. In addition, wells may have a little higher yield where thicker unconsolidated deposits of the Alluvial, Lacustrine, and Backwater Deposits Aquifer System overlie the Borden (in the larger valley bottoms). However, to date no attempt has been made to test these hypotheses.

Devonian and Mississippian New Albany Shale Aquifer System (beneath the Mississippian Borden Group Aquifer System)




This aquifer system occurs only in the subsurface of Brown County. It consists of predominantly brownish-black, carbon-rich shale having a thickness of about 100 to 125 feet. The Division has no records for wells completed in it. Permeability of this formation in the subsurface is probably quite low so that the potential for successful wells even for domestic needs would be very limited.

Silurian and Devonian Carbonate Aquifer System (beneath the New Albany Shale Aquifer System)


The Silurian and Devonian Carbonate Aquifer system is a limited ground-water resource in Brown County with very few wells utilizing this system. Depth and cost are two limiting factors. Most wells drilled into this system are intended for public supply or other larger volume needs. A few domestic wells resulted from converted oil and gas wells or test holes. Drilling to such depths, however, usually results in wells producing mineralized or salty water. Water containing hydrogen sulfide is also common where the New Albany Shale overlies the Silurian and Devonian Carbonate Aquifer system.

The Silurian and Devonian Carbonate Aquifer system is composed primarily of limestones and dolomite with some interbedded shale units. Because most individual units of the Silurian and Devonian system are composed of similar carbonate rock types, and cannot be easily distinguished on the basis of water well records, they are considered as a single water-bearing system.

The thickness of the Silurian and Devonian Carbonate Aquifer system in Brown County ranges from about 240 to 400 feet. Depths of existing wells completed in this aquifer system range from 475 to 850 feet. Because there are so few wells in this system, it is difficult to determine typical yields. Drillers have reported test rates as low as 4 gpm to as high as 415 gpm. A well drilled for the T.C. Steele State Historical Site is 790 feet deep. The well penetrates 570 feet of Borden, 112 feet of New Albany, and 103 feet of Devonian carbonates. The well was tested at 50 gpm, but the water is highly mineralized (2200 mg/L total dissolved solids and 1050 mg/L chlorides). Refer to the map for the location of this well. Static water levels in this system vary from approximately 150 feet to 300 feet below land surface. Water level drawdowns of 140 to 500 feet have been reported during well testing.

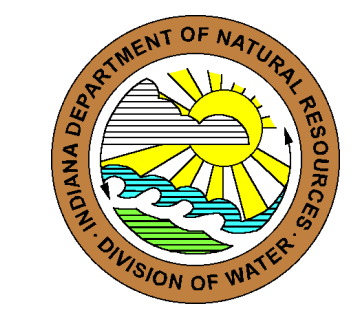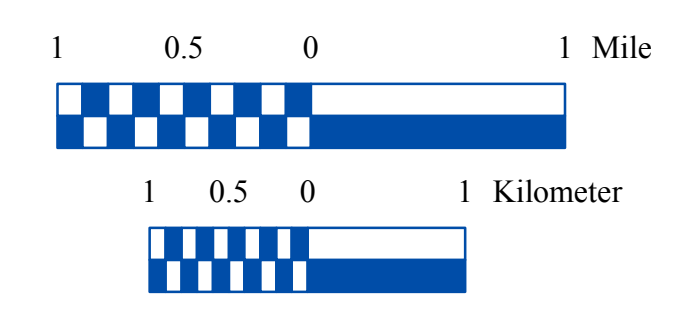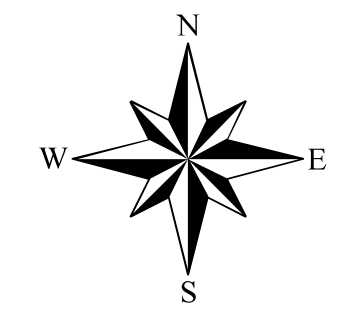

Location Map

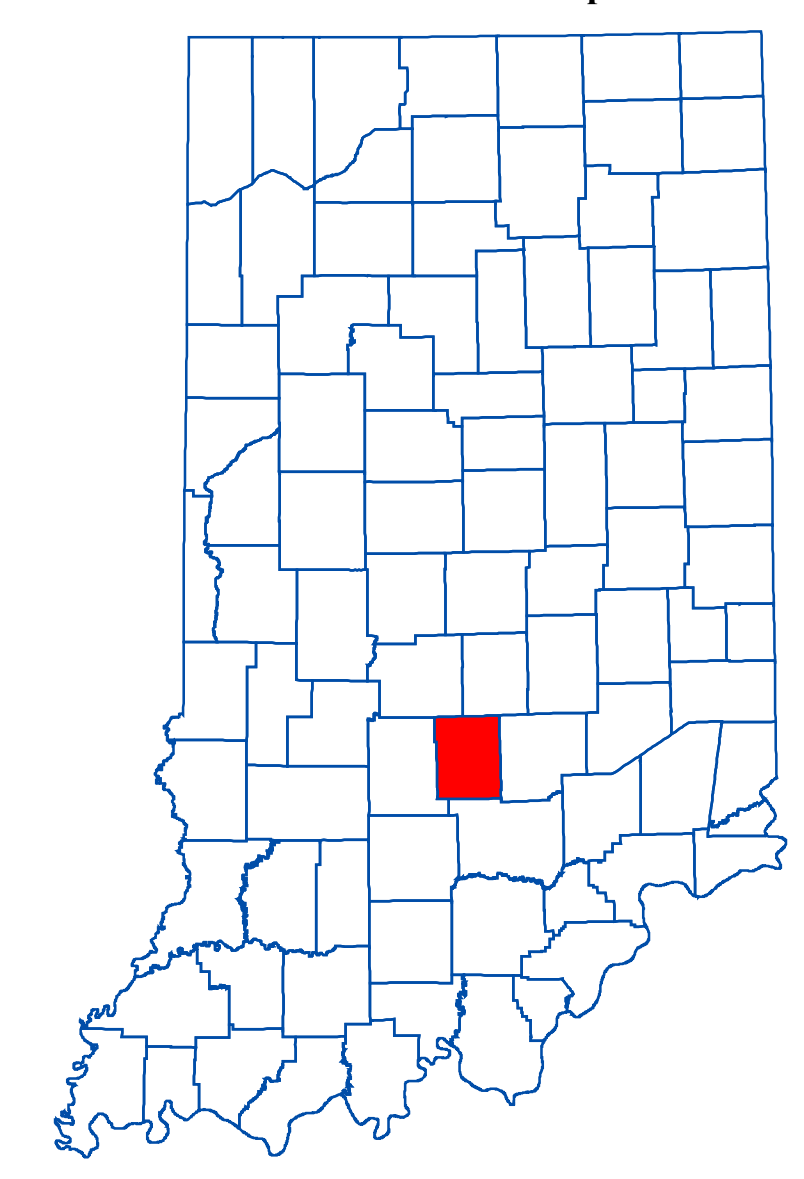

EXPLANATION

- County Road
- State Road & US Highway
- Stream
- Municipal Boundary
- Camp Atterbury
- Land Subject to Inundation
- National Park Service Managed Property
- State Managed Property
- Lake & River

Map Use and Disclaimer Statement

We request that the following agency be acknowledged in reports derived from this map: Indiana Department of Natural Resources, Division of Water.

This map was compiled by staff of the Indiana Department of Natural Resources, Division of Water using data believed to be reasonably accurate. However, a degree of error is inherent in all maps. This product is distributed "as is" without warranties of any kind, either expressed or implied. This map is intended for use only at the published scale.


This map was created from several existing shapefiles. Township and Range Lines of Indiana (line shapefile, 20020621), Land Survey Lines of Indiana (polygon shapefile, 20020621), and County Boundaries of Indiana (polygon shapefile, 20050521) were all from the Indiana Geological Survey and based on a 1:24,000 scale, except the Bedrock Geology of Southwestern Indiana (polygon shapefile, 20001124), which was at a 1:500,000 scale. System1 and System2 were from the Indiana Department of Transportation (line shapefile, 2003) and based on a 1:24,000 scale. Managed Areas96 (polygon shapefile, various dates) was from IDNR. City Areas in Southwestern Indiana (polygon shapefile, 1999) was from ESRI and based on a 1:100,000 scale. Streams27 (line shapefile, 20000420) was from the Center for Advanced Applications in GIS at Purdue University.

Bedrock Aquifer Systems of Brown County, Indiana

by
Randal D. Maier
Division of Water, Resource Assessment Section

May 2003

UNCONSOLIDATED AQUIFER SYSTEMS OF BROWN COUNTY, INDIANA

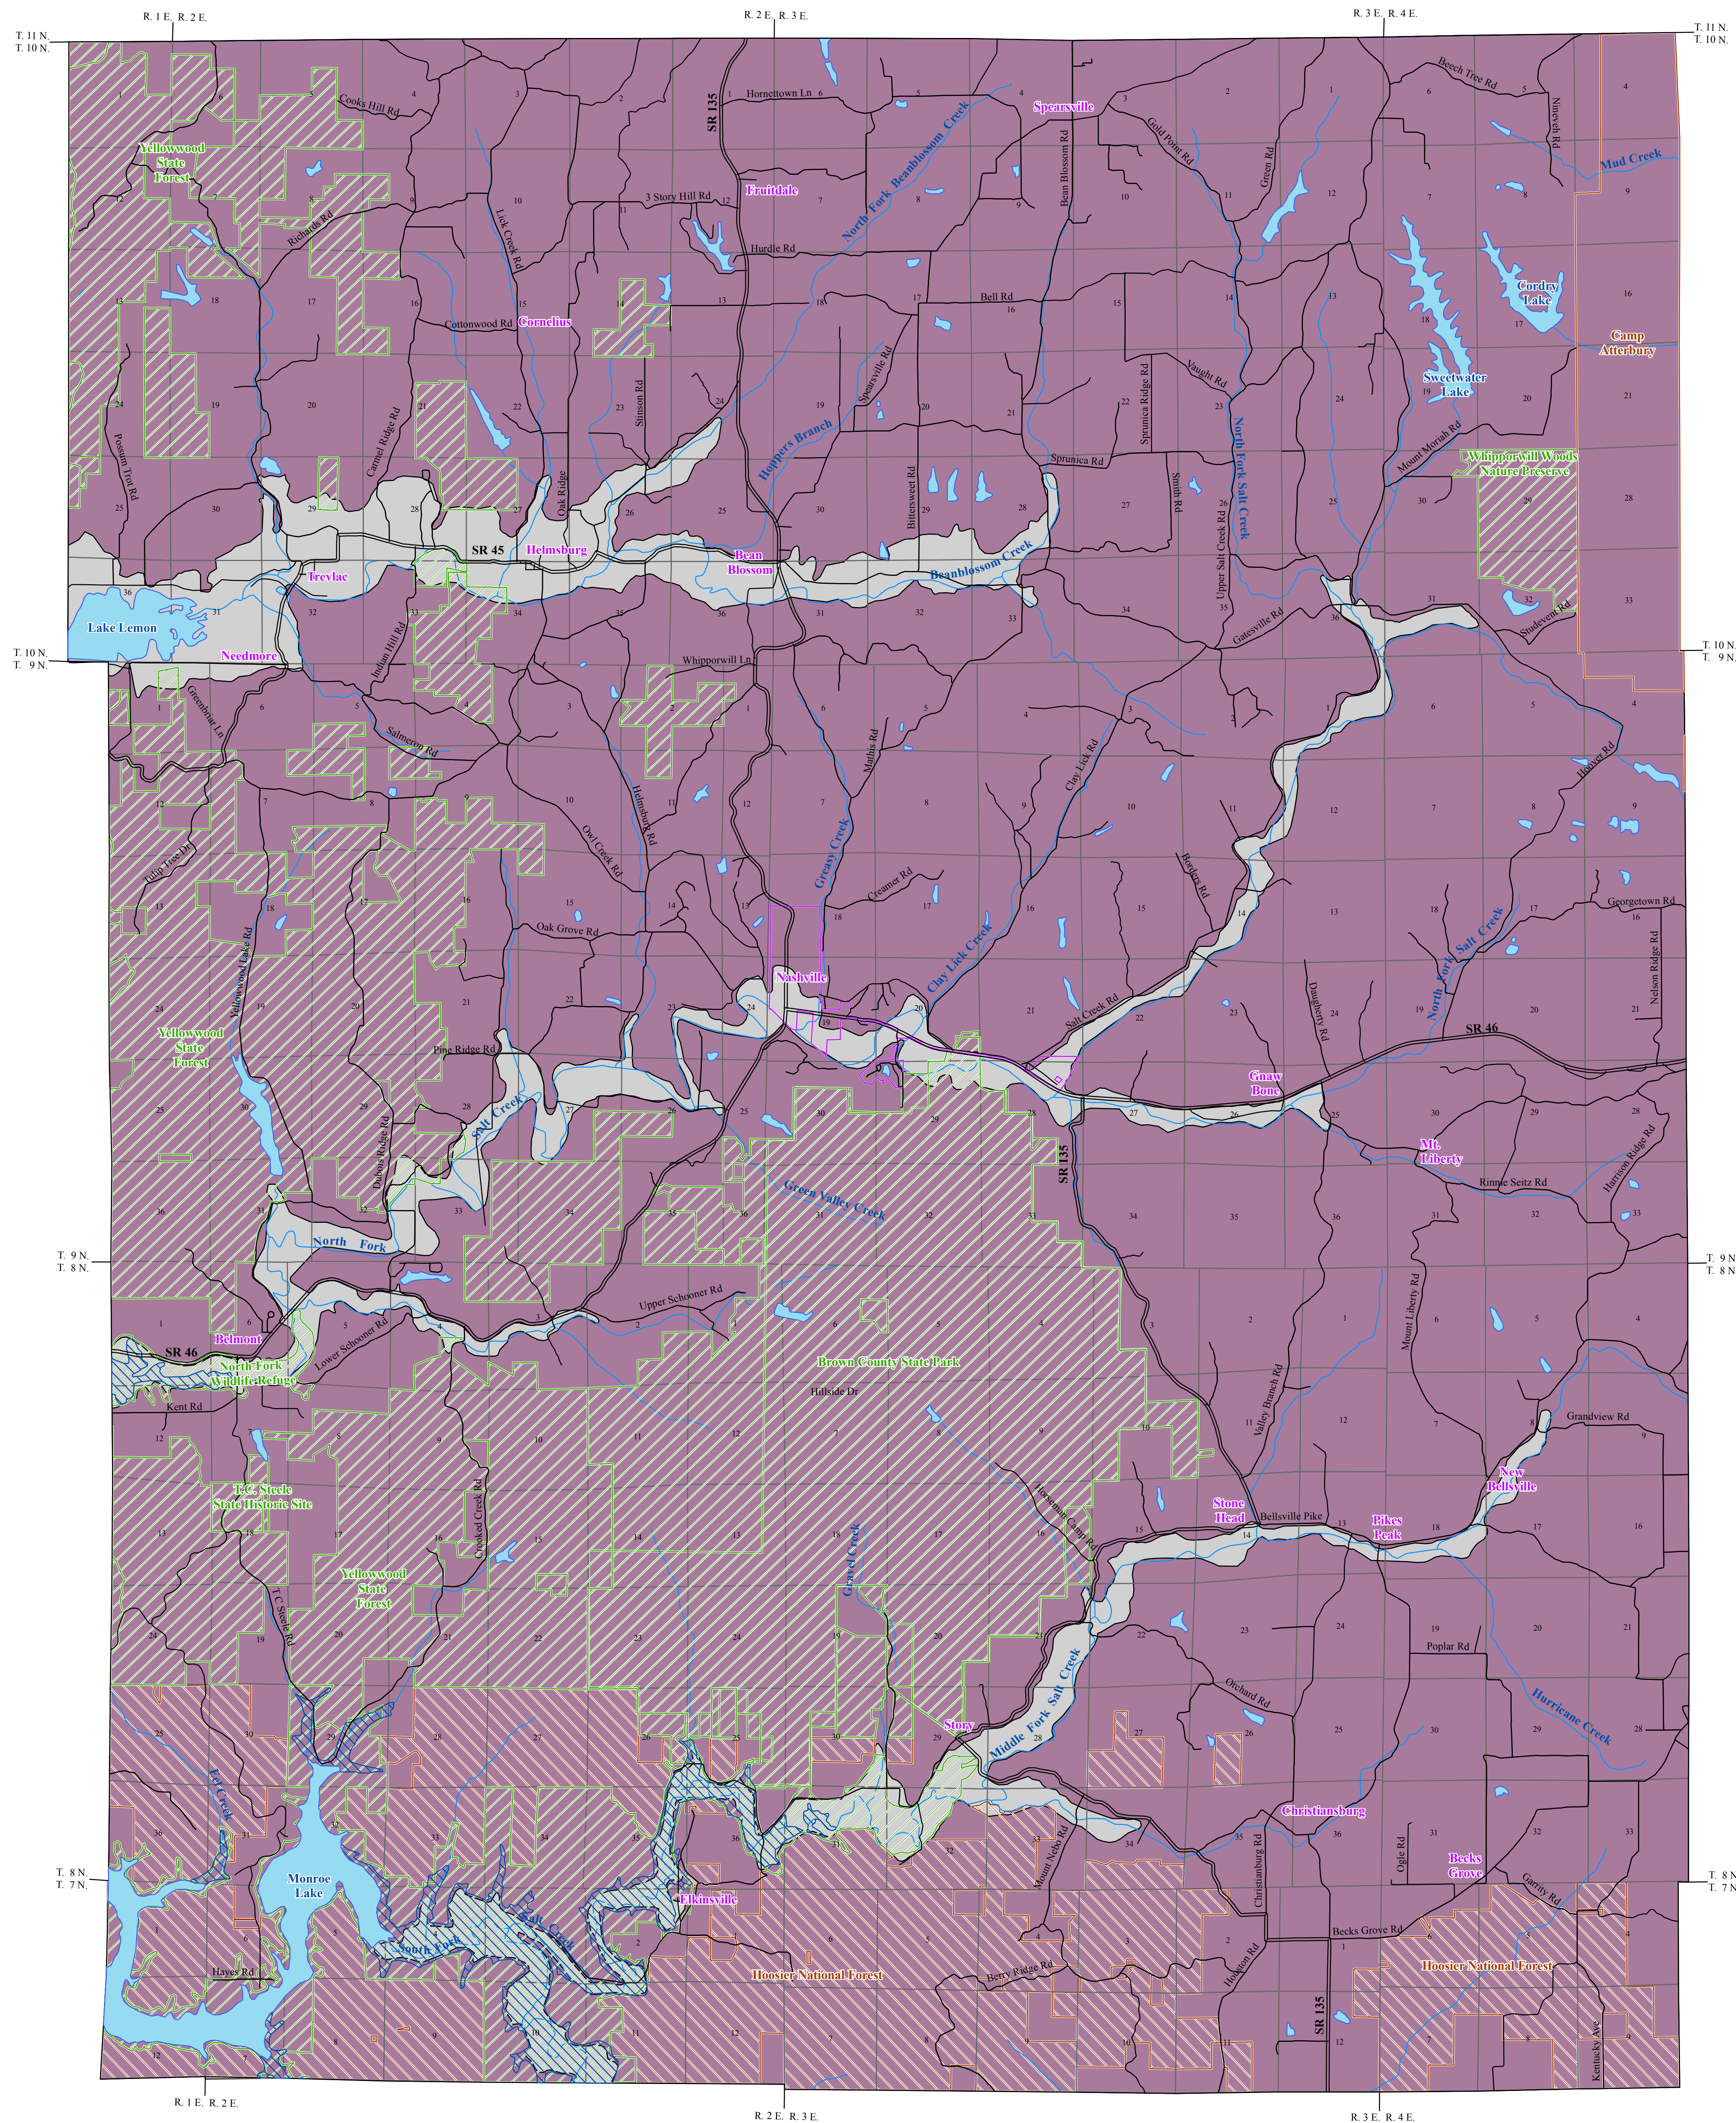

The unconsolidated aquifer systems mapped for Brown County include the Alluvial, Lacustrine, and Backwater Deposits and the Dissected Till and Residuum / Unglaciated Southern Hills and Lowlands. Boundaries between the systems are relatively well defined. Both systems have extremely limited potential for development of successful water wells. Drillers prefer completion of wells in the underlying bedrock aquifer system (Mississippian Borden Group). That too is quite limited, and many county residents prefer to tap into a public water supply system serving parts of the county.

Alluvial, Lacustrine, and Backwater Deposits Aquifer System

The Alluvial, Lacustrine and Backwater Deposits Aquifer System in Brown County is made up of heterogeneous bodies of alluvial, colluvial, and lacustrine materials within valley bottoms and along terraces of Bean Blossom Creek and Salt Creek. This aquifer system is an extremely limited resource in the county and the Division has no records for wells actually producing from these deposits. The potential for completion of a well in the unconsolidated deposits, however, does exist. Unconsolidated materials within the Alluvial, Lacustrine, and Backwater Deposits Aquifer System range from less than 5 feet to 50 feet thick.

Unconsolidated materials within the system include thin alluvial and colluvial deposits of Wisconsin and Holocene (Recent) age. Small remnants of pre-Wisconsin outwash are noted as terraces in the main valleys of Bean Blossom Creek and Salt Creek. Additionally, lacustrine deposits of Wisconsin and pre-Wisconsin age are noted only in the valley of Bean Blossom Creek. Discontinuous sand and gravel lenses, where present in this aquifer system, are expected to be less than 5 feet thick and may be confined within the fine-grained glaciolacustrine deposits, or may directly overlie bedrock.



The lacustrine deposits were formed in bodies of relatively stagnant lake water. The formation of these deposits can be attributed to larger river valleys, like the East Fork and West Fork White River, being choked with sand and gravel outwash materials carried by glacial meltwater that poured from the waning ice sheets. Thick deposits of this outwash dammed tributary streams, like Bean Blossom Creek and Salt Creek, thus creating lakes in which fine-grained glaciolacustrine deposits accumulated. Today, within the Bean Blossom valley bottoms and along some higher terraces, these deposits of silt and clay, sometimes called "slack water clay," mark the locations of former glacial lakes. The lacustrine deposits are often indicated on Quaternary geology maps and soil maps.

Dissected Till and Residuum / Unglaciated Southern Hills and Lowlands Aquifer System


The Dissected Till and Residuum / Unglaciated Southern Hills and Lowlands Aquifer System covers most of the county. It is an extremely limited aquifer resource, typified by very thin unconsolidated deposits overlying bedrock. Only in isolated portions of northern and eastern Brown County does the system include pre-Wisconsin glacial deposits typically limited to ridge tops. The rest of the aquifer system in the county includes unglaciated areas comprised of weathered bedrock residuum. The later Wisconsin glacial ice sheets stopped just north of the county line, thus depriving Brown County of potential aquifer materials common to counties farther north.

In Brown County no known wells produce from The Dissected Till and Residuum / Unglaciated Southern Hills and Lowlands Aquifer System. All domestic wells, for which the Division has records, produce from the underlying bedrock. Where only bedrock residuum is present, the chances of obtaining a successful drilled well in the unconsolidated deposits is quite limited. However, it is possible that the bedrock aquifer system could be enhanced by the presence of sporadic sand and gravel materials in limited areas of glacial drift on the ridge tops. A few old dug wells may still be used, but yields would be very small.

South of Bean Blossom Creek the thickness of unconsolidated materials ranges from 2 to 20 feet, however, north of Bean Blossom Creek the unconsolidated deposits are somewhat thicker. In limited areas pre-Wisconsin drift occurs up to 50 feet thick on ridge tops. One well near the Morgan County line reportedly penetrated 85 feet of clay, mud, and gumbo before being completed in bedrock. Although the potential for completion of an unconsolidated well is somewhat better in those small areas of glacial drift, the overall chances for successful wells in this aquifer system is still quite limited.

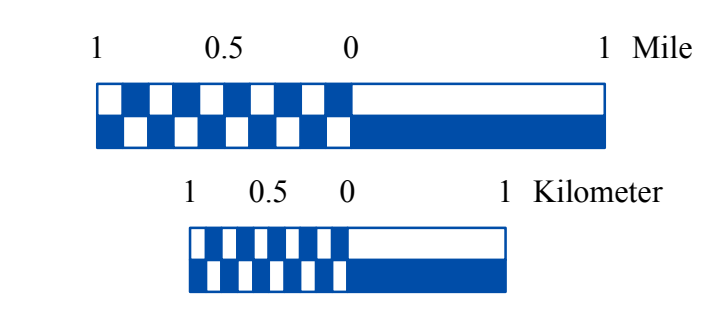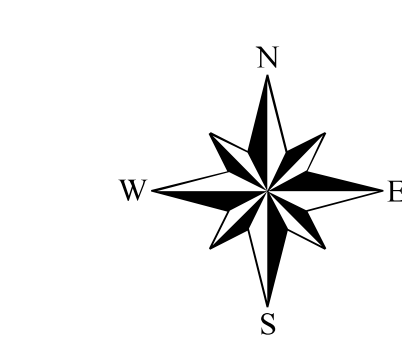

Location Map

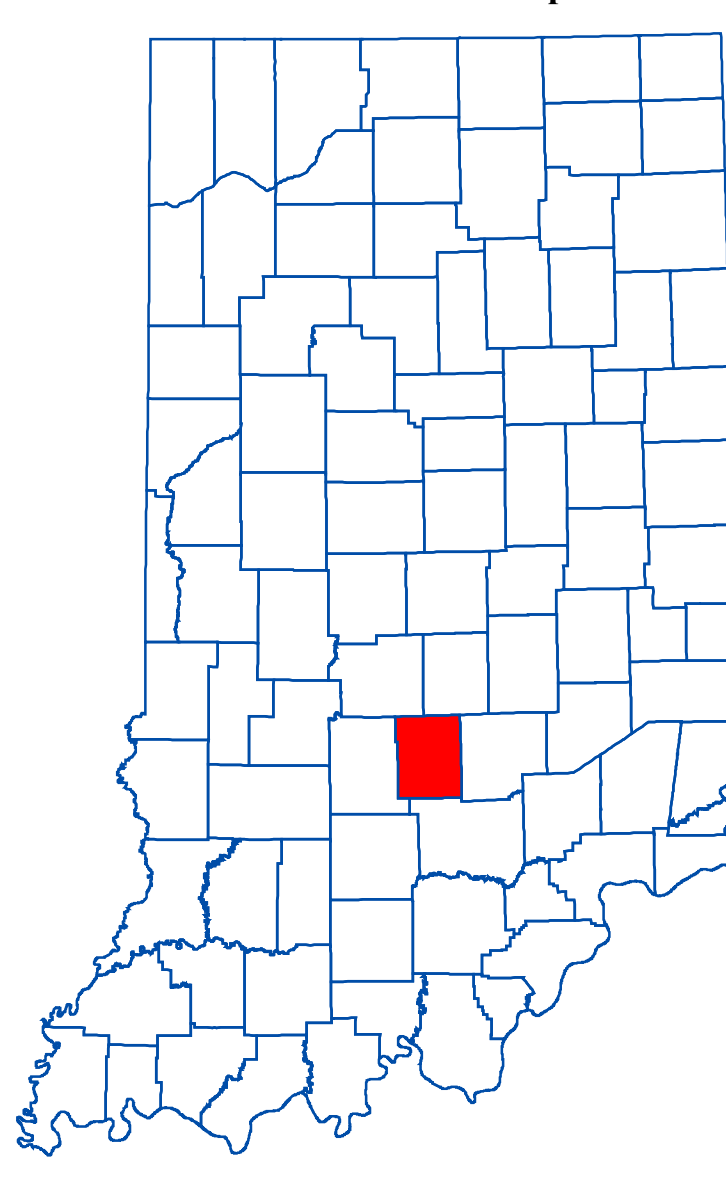

EXPLANATION

- County Road
- State Road & US Highway
- Stream
- Municipal Boundary
- Camp Atterbury
- Land Subject to Inundation
- National Park Service Managed Property
- State Managed Property
- Lake & River

Map Use and Disclaimer Statement

We request that the following agency be acknowledged in products derived from this map: Indiana Department of Natural Resources, Division of Water. This map was compiled by staff of the Indiana Department of Natural Resources, Division of Water using data believed to be reasonably accurate. However, a degree of error is inherent in all maps. This product is distributed "as is" without warranties of any kind, either expressed or implied. This map is intended for use only at the published scale.

This map was created from several existing shapefiles. Township and Range Lines of Indiana (line shapefile, 20020621), Land Survey Lines of Indiana (polygon shapefile, 20020621), and County Boundaries of Indiana (polygon shapefile, 20050621) were all from the Indiana Geological Survey and based on a 1:24,000 scale. City Areas in Southwestern Indiana (polygon shapefile, 1999) was from ESRI and based on a 1:100,000 scale. System1 and System2 are from the Indiana Department of Transportation (line shapefile, 2003) and based on a 1:24,000 scale. Managed Areas 96 (polygon shapefile, various dates) was from IDNR. Streams27 (line shapefile, 20000420) was from the Center for Advanced Applications in GIS at Purdue University. Unconsolidated Aquifer Systems coverage (Maier, 2003) was based on a 1:24,000 scale.

Unconsolidated Aquifer Systems of Brown County, Indiana

by
Randal D. Maier
Division of Water, Resource Assessment Section

May 2003

Map generated by Jennifer K. McMillan
IDNR, Division of Water, Resource Assessment Section,
May 2003

Brown County

